


Pipe Line Pendant P52608

Design modifications are always welcome.

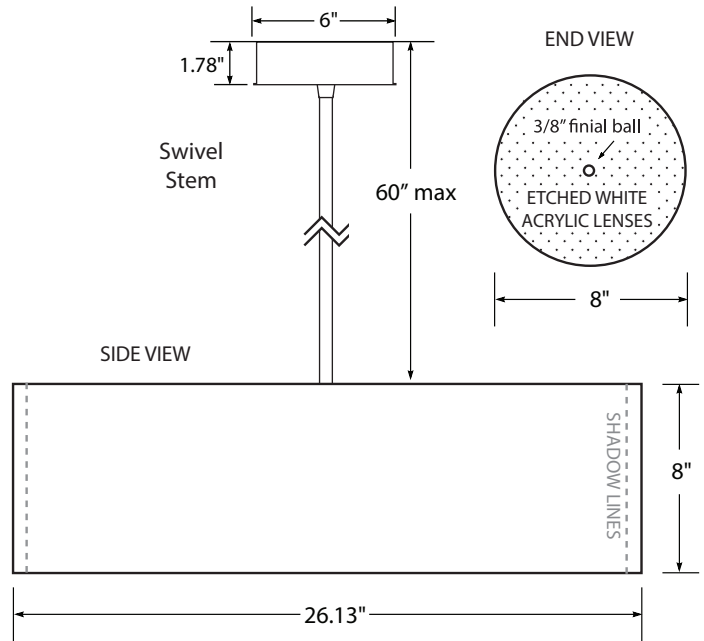

- Welded steel
- LUMENATE® washable diffuser
- Etched white acrylic lenses
- 60" (max) field cuttable ball swivel stem
- Canopy finished to match frame
- Mounts to standard J-box
- Suitable for damp locations

weight: 3 lbs



P52608					
	FINISH	DIFFUSER	LAMPING	VOLTAGE	
	F2 Chrome F3 Black F4 Earth F5 Copper F6 Brass F7 Bronze F8 Steel F10 Hammered Copper F11 White	Select from any of our LUMENATE® Diffuser options.	L416 - LED 3160 Initial Lumens 22.4 W 3000K Dimming: 0-10V UNV 1% Please contact customer service for component specifications including additional color temperatures. Lamps not included: 2/14W T5	120V 277V 347V CFL Only	

+ OPTIONS

SUSPENSION OPTIONS

STM - Stem Length
Specify length & color

CANOPY OPTIONS

- CAC** - Canopy Alternative Color
 - CF105** - Flair Canopy 10.5" Dia
 - CSF105** - Swivel Stem on CF105
 - CR432** - Cluster Canopy* 4.5" x 42"
 - CR860** - Cluster Canopy* 8" x 60"
 - CC105** - Cluster Canopy* 10.5" Dia
 - CC240** - Cluster Canopy* 24" Dia
 - C66** - Square Canopy 6"
 - C1010** - Square Canopy 10"
- * Specify arrangement and heights.

LENS OPTIONS

LBA2 - Lens with applied LUMENATE®

LED OPTIONS

EMR - Remote Emergency Battery Backup
Requires Stem or 2 Power Cords

CFL BALLAST OPTIONS

- BDLI** - Dimming Ballast Lutron Internal
- BDAI** - Dimming Ballast Advance Internal
- BER** - Emergency Ballast Remote

Project Name	Specifier Name & Location	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>

Notes



Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 www.lumetta.com

This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.